




ceda\libs\cxLss\pics\lss-heap

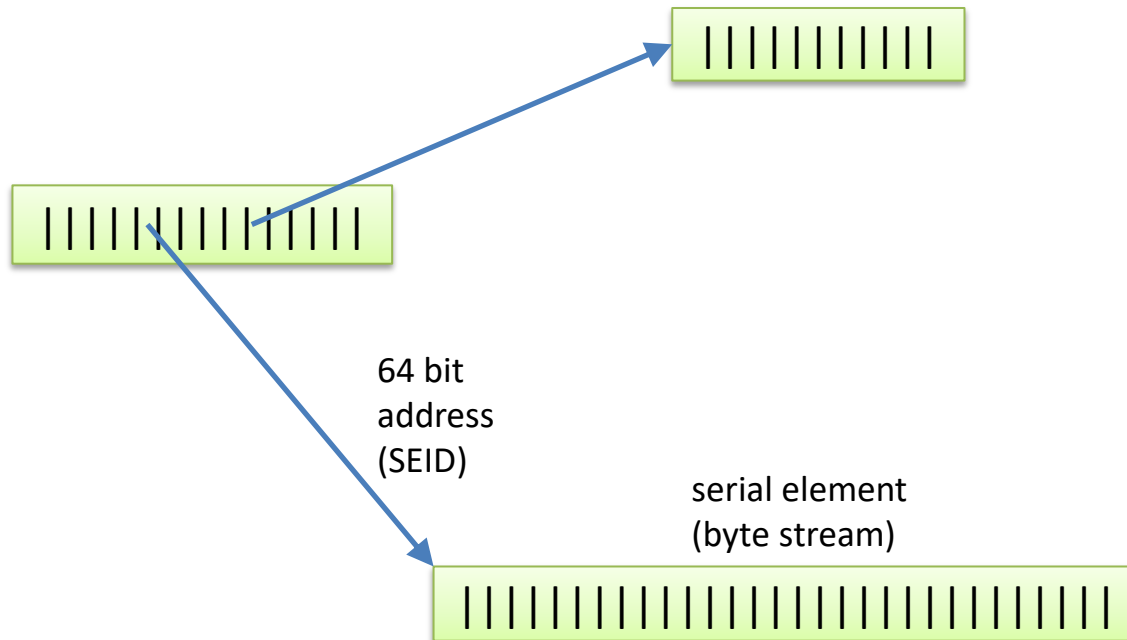


ceda\libs\cxLss\pics\lss-seids-are-virtual-addresses

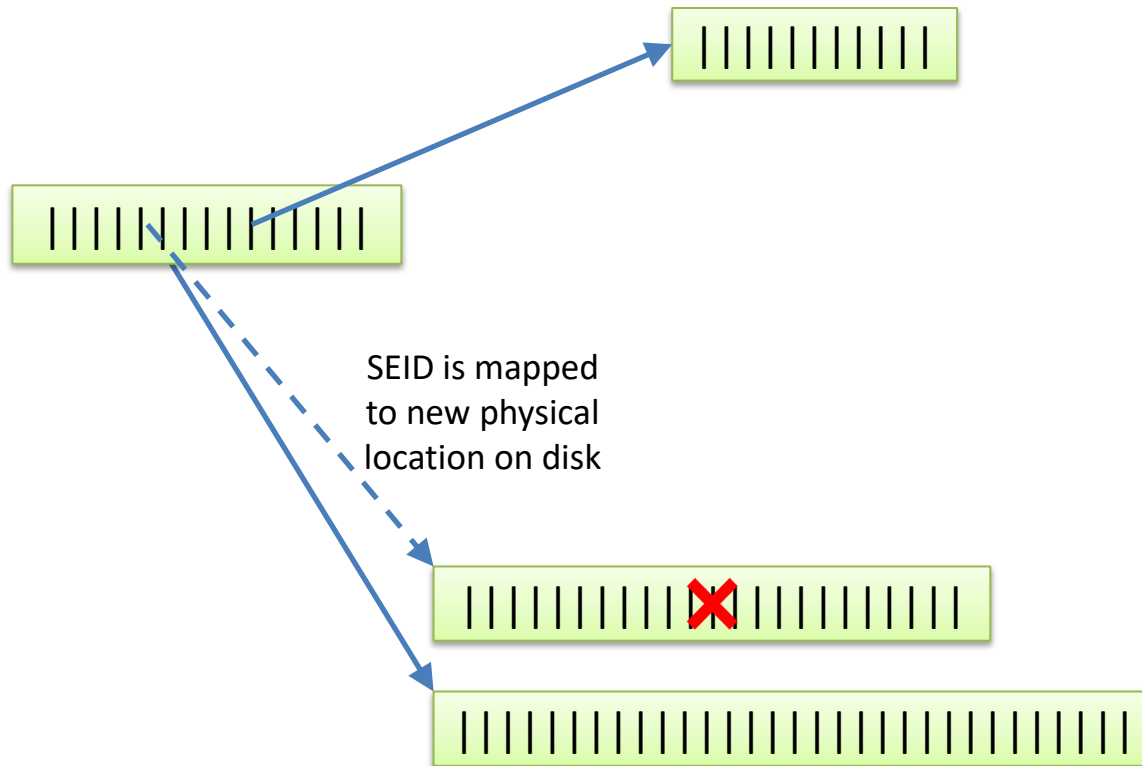


ceda\libs\cxLss\pics\lss-file

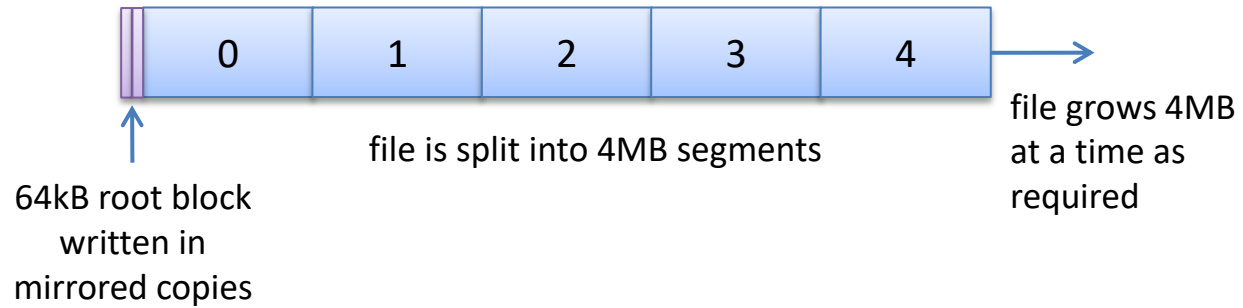


ceda\libs\cxLss\pics\lss-segment

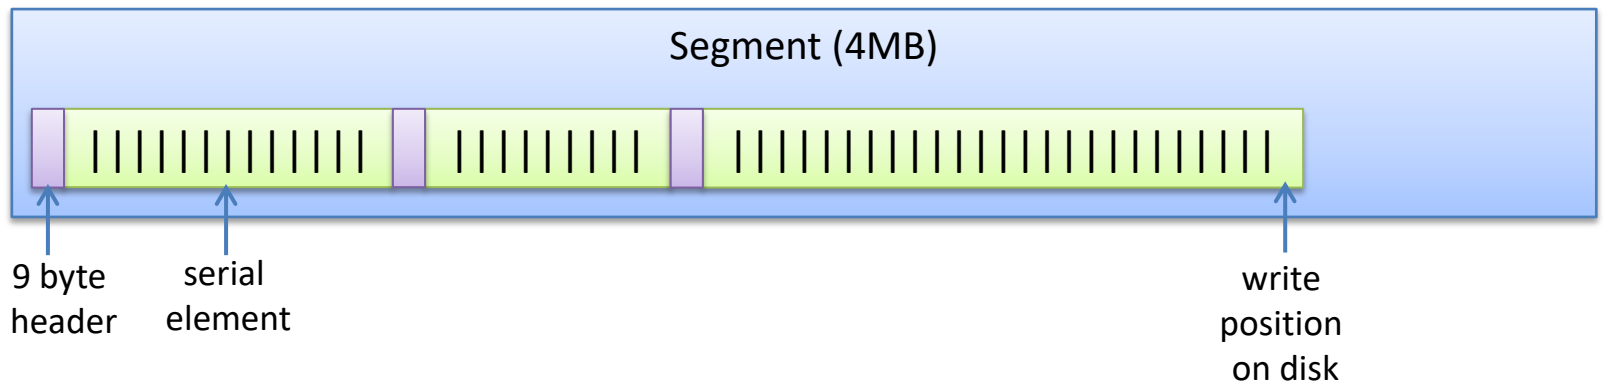


If segment utilisation falls below 80% then remaining serial elements are copied to the end of the log and the segment is recycled

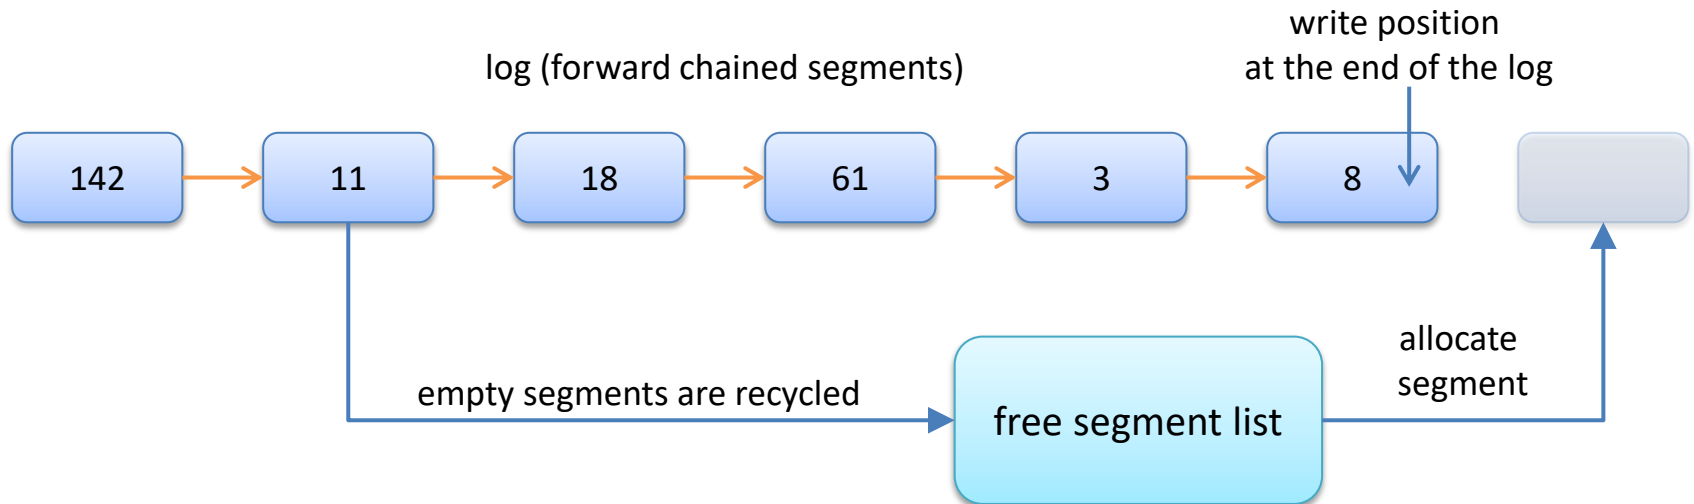


ceda\libs\cxLss\pics\lss-segment-cleaner

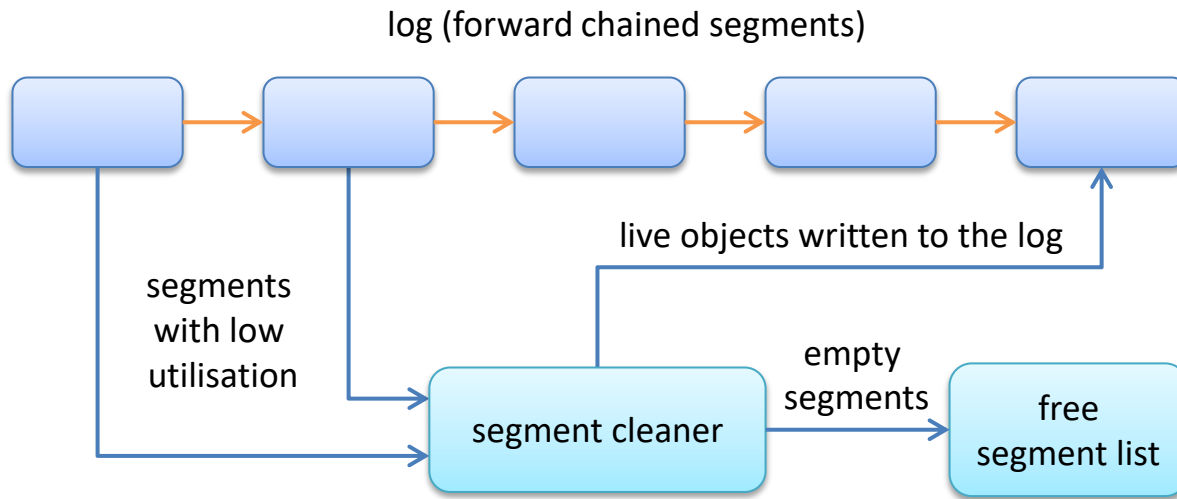


ceda-implementation\LSS\pics\lss-components

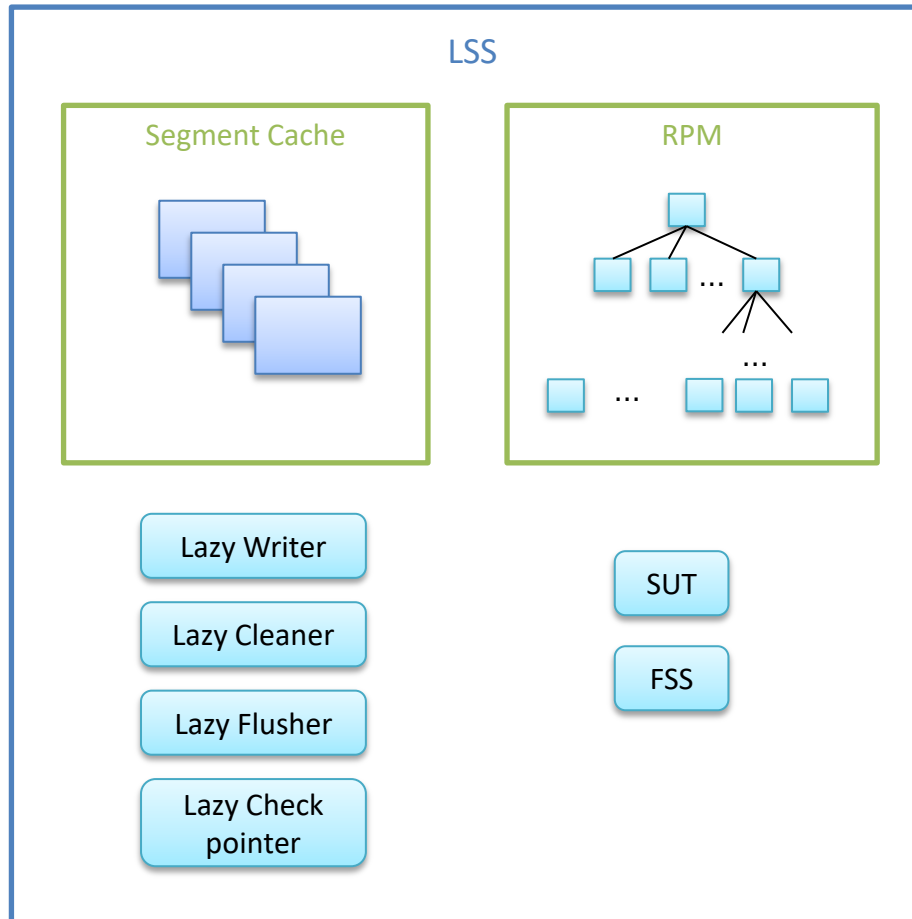



ceda-implementation\LSS\pics\seq

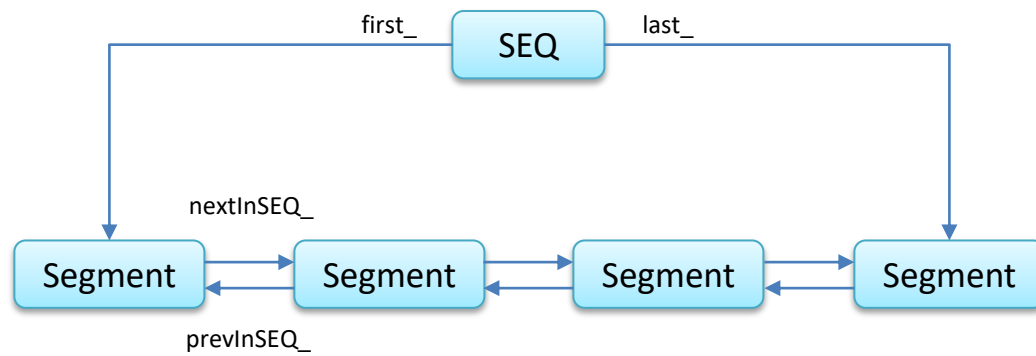

ceda-implementation\LSS\pics\rpm-class-hierarchy

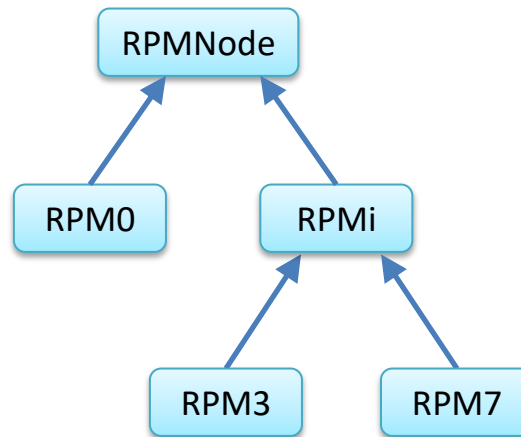

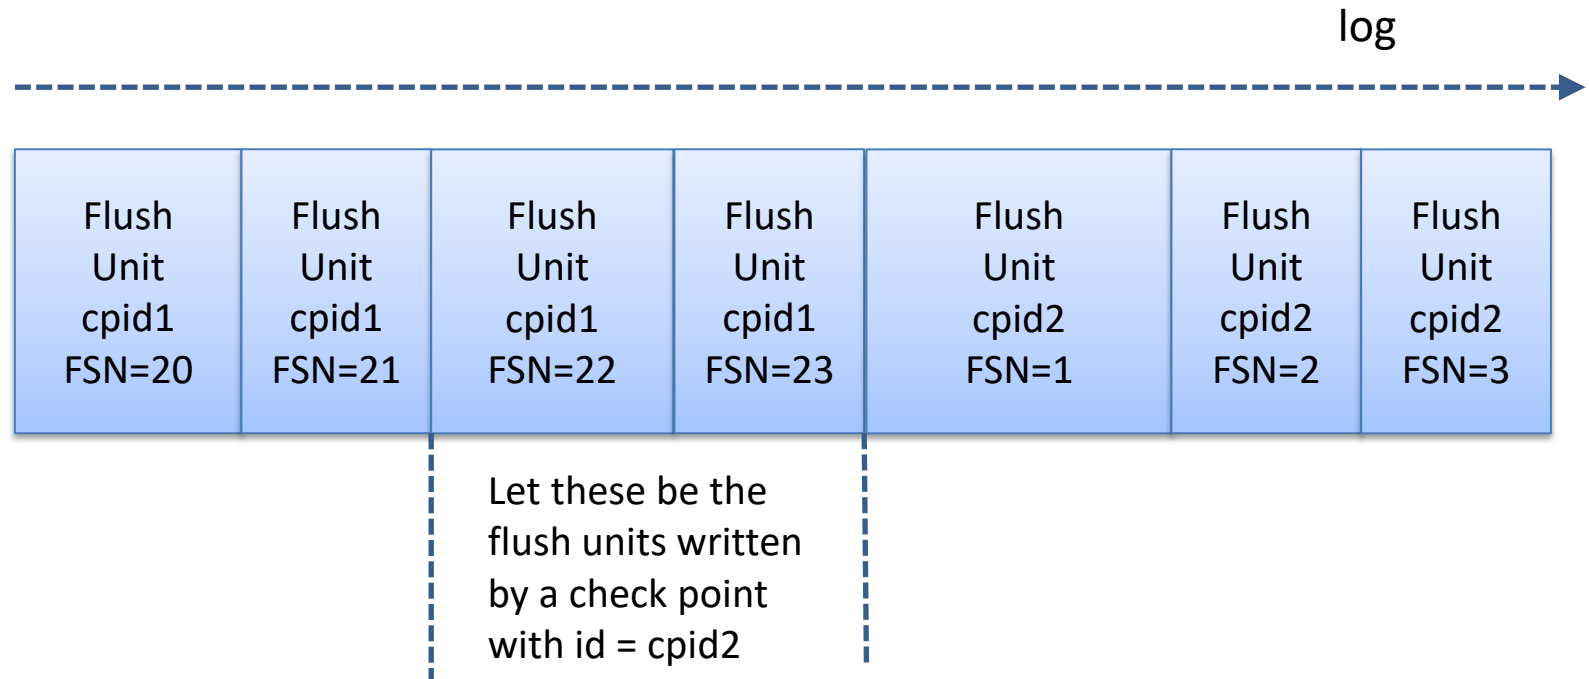

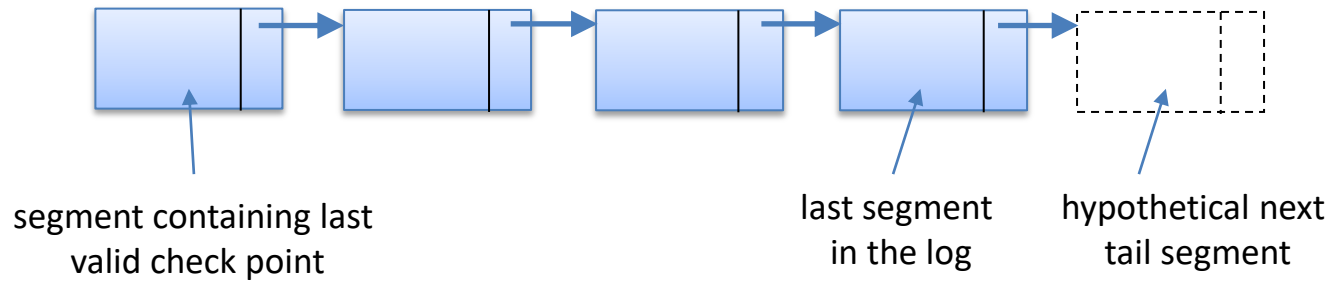

ceda-implementation\LSS\pics\rpm

